


RIGHT ANGLE GUN

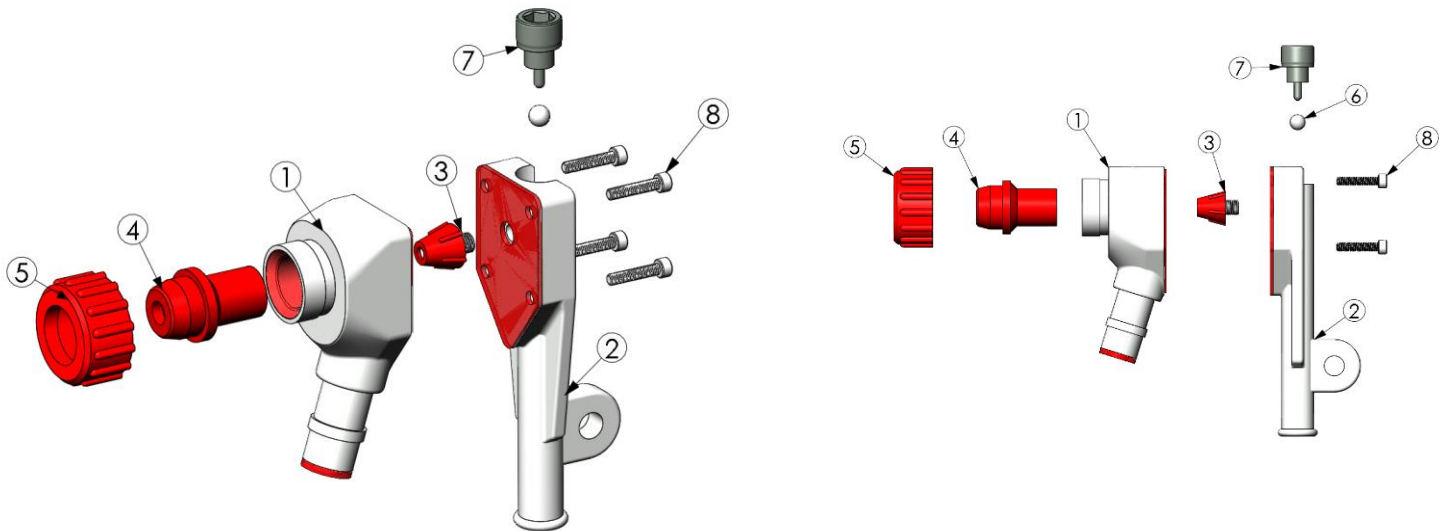

ITEM	QTY	GUYSON P/N	DESCRIPTION	PREVIOUS ABS P/N
1	1	101012	FRONT HALF, RIGHT ANGLE GUN	197-020291
2	1	101001	REAR, RIGHT ANGLE GUN	197-700011
3*	**	**	AIR JET	20293
4	**	**	NOZZLE	01-200A
5	1	101015	NUT, NOZZLE	20200
6	1	101049	NONRETURN BALL	01-2048
7	1	101016	PEGS/BALL SEAT, RIGHT ANGLE GUN	200-700014
8	4	BIN-STOCK	SCREW, GUN BODY M6 X 30 MM	NO PART ID

101068 INCLUDES:

1 – 100191 NOZZLE, 1/2" W/O JACKET WAS 01-200A

1 – 101013 JACKET, NOZZLE WAS 20219

Nozzle Replacement (item 4)

- Replace 3/8" nozzle if 5/8" drill bit can enter nozzle
 - Replace 1/2" nozzle if 3/4" drill bit can enter nozzle
1. Un-thread nozzle nut item #5
 2. Remove old nozzle, pliers may be necessary to twist nozzle to remove
 3. Wipe clean the area where the nozzle sits in the gun body
 4. Insert new nozzle
 5. Replace nozzle nut

Air Jet Replacement (item 3)

Note: Failure to replace the air jet will cause damage to the gun body.

- Replace 3/16" air jet if a 1/4" drill bit can enter
 - Replace 17/64" air jet if a 5/16" drill bit can enter
1. Remove the four (4) M6x25 socket head screws (item 8)
 2. Separate gun body (items 1 & 2)
 3. Remove conical shaped air jet using channel lock pliers
 4. Reinstall new air jet – HAND TIGHTEN ONL
 5. Reassemble the gun body and tighten the four (4) M6x25 socket head screws (item 8)

Contact your Guyson Customer Service Representative for Application Assistance and Current Pricing!

Phone:800-633-6677 or 518-587-7894

Email:custsvc@guyson.com